

Signet 2850 Conductivity/Resistivity Sensor Electronics and Integral Systems



Description

The Signet 2850 Conductivity/Resistivity Sensor Electronics are available in various configurations for maximum installation flexibility. The universal mount version is for pipe, wall, or tank mounting and enables single or dual (digital versions only) inputs using any standard Signet conductivity / resistivity sensor. The threaded j-box version can be used with these same Signet sensors for submersible sensor mounting. It is also available as a combined integral system configuration for in-line mounting and includes a conductivity electrode in a choice of 0.01, 0.1, 1.0, or 10.0 cm⁻¹ cell constants. The 2850 is ideal for applications with a conductivity range of 0.055 to 200,000 µS or a resistivity range of 18.2 MΩ to 10 kΩ.

All 2850 units are available with a choice of two outputs, digital (S³L) or 4 to 20 mA. The digital

(S³L) output version allows for up to six sensor inputs directly into the Signet 8900 Multi- Parameter Controller. The two-wire 4 to 20 mA output is available with eight 4 to 20 mA output ranges for each electrode cell constant. Additionally, each range can be inverted and are field selectable by the user.

All 2850 units are built with NEMA 4X/IP 65 enclosures which allow wiring connections with long cable runs of up to 1,000 feet (305 m). EasyCal is a standard feature that automatically recognizes conductivity test solution values for simple field calibration. A calibration tool is available for validation of the sensor electronics according to USP requirements.

Features

- Integral mount systems for quick and easy installation
- Compact design for maximum installation flexibility
- Digital (S³L) interface or two-wire 4 to 20 mA output
- EasyCal with automatic test solution recognition
- Dual channel unit available for low cost installation with Signet 8900 Multi-Parameter Controller
- For use with ALL Signet conductivity electrodes

Applications

- Water Treatment & Water Quality Monitoring
- Reverse Osmosis
- Deionization
- Demineralizer, Regeneration & Rinse
- Scrubber, Cooling tower and Boiler Protection
- Aquatic Animal Life Support Systems




System Overview


In-Line Sensor Installation				Submersible Installation	
Panel Mount Signet 8900 Instrument (sold separately)	4 to 20 mA Input Programmable Logic Controller	Panel Mount Signet 8900 Instrument (sold separately)	4 to 20 mA Input Programmable Logic Controller	Panel Mount Signet 8900 Instrument (sold separately)	4 to 20 mA Input Programmable Logic Controller
Signet 2850 Conductivity System		Signet 2850 Universal Mount	Signet 2850 Universal Mount or Threaded J-Box		
Signet 2819-2823 or 2839-2842 Conductivity Electrode (sold separately)					
Fittings (3/4 in. NPT or ISO) - Customer supplied					

Dimensions


2850-5X threaded J-Box



2850-6X Universal Mount Systems




2850-5X-XX Integral Mount Systems

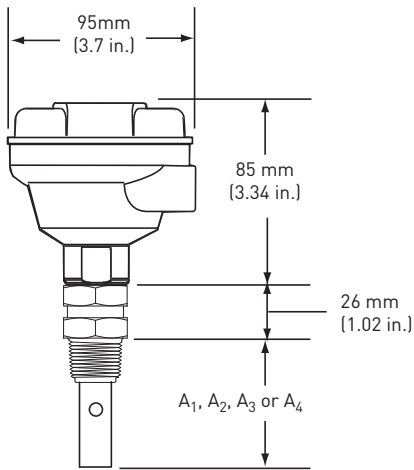

- A₁ (3-2839) = 73mm (2.88 in.)
- A₂ (3-2840) = 35mm (1.38 in.)
- A₃ (3-2841) = 41.3mm (1.63 in.)
- A₄ (3-2842) = 41.3mm (1.63 in.)

Operating Range Chart

The 2850 is capable of measuring conductivity and resistivity values over a wide range. Below is a chart of Signet Conductivity/Resistivity electrodes (listed in each range box) that is recommended for the specified measurement range.

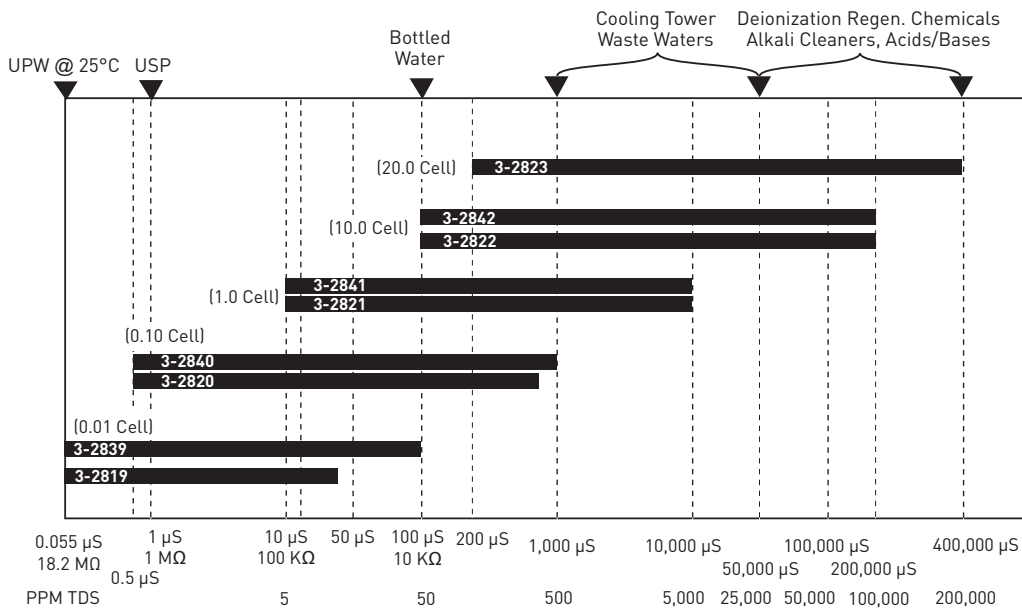

Specifications:

General

Compatible Electrodes: All Signet models with PT-1000 RTD

Materials:

- Threaded j-box for Integral mount: PBT
- Universal/Remote mount: PBT, CPVC

Temperature Compensation: PT-1000 RTD

Easy-Cal: Automatic recognition of the following conductivity values:

- 146.93 μS , 1408.8 μS , 12856 μS (@25°C) [Test solutions Per ASTM D1125-95]
- 10 μS , 100 μS , 200 μS , 500 μS , 1000 μS , 5000 μS , 10,000 μS , 50,000 μS , 100,000 μS (@25°C) [Standard test solutions]

Electrical

Power:

- 12 to 24 VDC for 4 to 20 mA output (typically called "Loop Powered")
- 5 VDC +/-5% regulated (provided by the Signet 8900), 3.0 mA max for Digital (S³L) output (Reverse polarity and short circuit protected)

Digital (S³L) Output: Serial ASCII, TTL level 9600 bps

- Accuracy:
 - Conductivity: $\pm 2\%$ of reading
 - Temperature: $\pm 0.5^\circ\text{C}$
- Resolution:
 - Conductivity: 0.1% of reading
 - Temperature: $< 0.2^\circ\text{C}$
- Update Rate:
 - Single channel models: < 600 ms
 - Dual channel models: < 1200 ms

Electrical (continued):

Available data via Digital (S³L) Output:

- Raw conductivity
- Calibrated conductivity
- Calibrated temperature-compensated conductivity
- Temperature

Error Indication: Open input and out of range diagnostics for temperature or internal electronic error.

Environmental

Enclosure rating: NEMA 4X/IP65

Operating Temperature:

-10°C to 85°C (14°F to 185°F)

Storage Temperature:

-20°C to 85°C (-4°F to 185°F)

Relative Humidity:

0 to 95%, non-condensing

Current Output:

- Field-selectable ranges
- Factory set Span:
 - 0.01 cell (2819, 2839): 4 to 20 mA = 0 to 100 μS
 - 0.10 cell (2820, 2840): 4 to 20 mA = 0 to 1000 μS
 - 1.0 cell (2821, 2841): 4 to 20 mA = 0 to 10,000 μS
 - 10.0 cell (2822, 2842): 4 to 20 mA = 0 to 200,000 μS
 - 20.0 cell (2823): 4 to 20 mA = 0 to 400,000 μS
- Max. Loop Resistance:
 - 50 Ω @ 12 VDC
 - 325 Ω @ 18 VDC
 - 600 Ω @ 24 VDC
- Accuracy: $\pm 2\%$ of output span
- Resolution: 7 μA
- Update Rate: < 600 ms
- Error Indication: 22 mA


- Pure Water Compensation:
 - When using 0.01-cm cell and raw conductivity value $< 0.5 \mu\text{S}$, the 2850 auto-switches to compensate for non-linear temperature effects found in this low conductivity (high resistivity) range

Shipping weight:

- Threaded j-box: 0.75 kg (1.75 lb.)
- Universal mount: 0.75 kg (1.75 lb.)

Standards and Approvals

- CE
- Immunity: EN61326-1
- Emissions: EN55011 Class B
- Manufactured under ISO 9001 and ISO 14001




Integral System includes the 2850 sensor electronics and a choice of Conductivity/Resistivity electrode.


Field Selectable Ranges for 4 to 20 mA Operation

The chart below indicates the field selectable ranges in which the 2850 sensor electronics can be set via internal switches. All ranges can be inverted if required. Signet Models listed below are compatible Conductivity/Resistivity electrodes.

0.01 Cell	0.10 Cell	1.0 cell	10.0 Cell	20.0 Cell
Signet Model 2819 or 2839	Signet Model 2820 or 2840	Signet Model 2821 or 2841	Signet Model 2822 or 2842	Signet Model 2843
10 to 20 MΩ	0 to 2 μS	0 to 20 μS	0 to 200 μS	0 to 400 μS
2 to 10 MΩ	0 to 5 μS	0 to 50 μS	0 to 500 μS	0 to 1,000 μS
0 to 2 MΩ	0 to 10 μS	0 to 100 μS	0 to 1,000 μS	0 to 2,000 μS
0 to 1 M Ω	0 to 50 μS	0 to 500 μS	0 to 5,000 μS	0 to 10,000 μS
0 to 5 M Ω	0 to 100 μS	0 to 1000 μS	0 to 10,000 μS	0 to 20,000 μS
0 to 10 M Ω	0 to 200 μS	0 to 2000 μS	0 to 50,000 μS	0 to 100,000 μS
N/A	0 to 500 μS	0 to 5,000 μS	0 to 100,000 μS	0 to 200,000 μS
N/A	0 to 1,000 μS	0 to 10,000 μS	0 to 200,000 μS	0 to 400,000 μS
The 4 to 20 output ranges shown in this chart can be inverted using the internal switch				
Resistivity Ranges are in BOLD				



-5X threaded J-Box



-6X Universal/Remote Mount

Ordering Information

2850 Integral Systems

Use this ordering matrix when an integral 2850 system is desired (uses 2839-2842 series electrodes). Integral systems are shipped with a sensor and 2850 combined. Other 2850 systems are available with Signet 2819 to 2823 electrodes upon request. See individual electrode product pages for more information.

Integral Mount System (includes Sensor Electronics and electrodes)				
3-2850	Conductivity and Resistivity Sensor Electronics			
↓	Output Type			
	-51	Digital (S ³ L) output with EasyCal		
	-52	4 to 20mA output with EasyCal		
	↓	Sensor Option		
		-39	2839 Electrode, 0.01 cell	
		-40	2840 Electrode, 0.1 cell	
		-41	2841 Electrode, 1.0 cell	
		-42	2842 Electrode, 10.0 cell	
	↓	Process threaded connection types		
		D	ISO threads	
-		NPT threads		
3-2850	-52	-39	Example Part Number	

2850 Sensor Electronics

Use this ordering matrix when remote sensor mounting is desired. The 2850-5X and 2850-6X are compatible with ALL Signet conductivity electrodes. See individual electrode product pages for more information.

Sensor Part Number				
3-2850	Conductivity Sensor Electronics with 4 to 20 mA or digital output			
↓	Mounting configurations			
	-5	3/4 inch threaded j-box for standpipe mounting, single input only		
	-6	Universal Mount Junction Box for remote mount, single or dual input		
	↓	Output choices		
		1	one input/one Digital (S ³ L) output	
		2	one input/one 4 to 20 mA output	
		3	two inputs/two Digital (S ³ L) outputs (available for -6X versions only)	
	3-2850	-5	2	Example Part Number

Mfr. Part No.	Code	Mfr. Part No.	Code
3-2850-51	159 001 398	3-2850-51-41D	159 001 345
3-2850-51-39	159 001 339	3-2850-51-42D	159 001 346
3-2850-51-40	159 001 340	3-2850-52	159 001 399
3-2850-51-41	159 001 341	3-2850-52-39	159 001 347
3-2850-51-42	159 001 342	3-2850-52-40	159 001 348
3-2850-51-39D	159 001 343	3-2850-52-41	159 001 349
3-2850-51-40D	159 001 344	3-2850-52-42	159 001 350

Model 2850

Ordering Notes:

- 1) All 2850 units can be used with any Signet Conductivity/Resistivity electrode
- 2) Integral systems are only offered with Signet models 2839-2842 electrodes. However, they may be integrally mounted with the 2819-2842 series using a second threaded connection (sold separately) part numbers 3-2820.390 or 3-2820.391.
- 3) Dual channel units are only available in the universal/remote mount configuration and with digital (S³L) output for use with the 8900 instrument.

Application Tips:

- Maximum distance between sensor and 2850 electronics is 4.6m (15 ft.).
- Longer cable runs may result in small temperature compensation offsets, but can be adjusted through calibration in the 8900.

Please refer to Wiring, Installation and Accessories for more information.

Mfr. Part No.	Code
3-2850-52-39D	159 001 351
3-2850-52-40D	159 001 352
3-2850-52-41D	159 001 353
3-2850-52-42D	159 001 354
3-2850-61	159 001 400
3-2850-62	159 001 401
3-2850-63	159 001 402

Accessories and Replacement Parts

Mfr. Part No.	Code	Description
3-2850.101-1	159 001 392	Plug-in NIST traceable recertification tool, 1.0 µS simulated
3-2850.101-2	159 001 393	Plug-in NIST traceable recertification tool, 2.5 µS simulated
3-2850.101-3	159 001 394	Plug-in NIST traceable recertification tool, 10.0 µS simulated
3-2850.101-4	159 001 395	Plug-in NIST traceable recertification tool, 18.2 MΩ simulated
3-2850.101-5	159 001 396	Plug-in NIST traceable recertification tool, 10.0MΩ simulated
3-2839-3	159 001 355	Electrode - 0.01 µS/cm, 6 in. cable, NPT
3-2839-3D	159 001 359	Electrode - 0.01 µS/cm, 6 in. cable, ISO
3-2840-3	159 001 356	Electrode - 0.1 µS/cm, 6 in. cable, NPT
3-2840-3D	159 001 360	Electrode - 0.1 µS/cm, 6 in. cable, ISO
3-2841-3	159 001 357	Electrode - 1.0 µS/cm, 6 in. cable, NPT
3-2841-3D	159 001 361	Electrode - 1.0 µS/cm, 6 in. cable, ISO
3-2842-3	159 001 358	Electrode - 10.0 µS/cm, 6 in. cable, NPT
3-2842-3D	159 001 362	Electrode - 10.0 µS/cm, 6 in. cable, ISO
5523-0322	159 000 761	Cable, 3-cond. plus shield, 22AWG