

# NUFLO MC-III EXP Flow Analyzer

Cameron's NUFLO™ MC-III™ EXP Flow Analyzer provides state-of-the-art liquid and gas measurement with data logging and Modbus® communications in an easy-to-use explosion-proof totalizer.

The MC-III EXP stores more flow logs and downloads them faster than any other flow analyzer on the market.

This powerhouse records up to 384 daily flow logs, 768 hourly logs, 345 event logs and downloads them to your computer via Modbus in less than a minute.

The MC-III EXP is designed to perform reliably in hazardous areas and in the harshest environmental conditions across the globe.

The MC-III EXP connects to a gas or liquid turbine meter or a pre-amplifier. Users can select a 4-20 mA output, a pulse output or an amplified flow meter frequency output that allows remote equipment to calculate flow rates and volume.



Users can access every configuration parameter from one screen.

## Benefits

The MC-III EXP offers:



- RS-485 Modbus communications
- Extensive log archival capacity
- High-speed data downloads
- Interactive software for quick and easy calibration and data access
- Simultaneous indication of rate and total
- Easy-to-read LCD displays
- Loop-powered analog output
- 12-point linearization
- Nonvolatile memory
- Password-protected security
- Optional hardware for daily log viewing and external laptop connection
- Intrinsically safe RS-485 output (option)
- CSA, ATEX, IECEx and CE approvals

## Calibration

Calibrating the MC-III EXP is as easy as entering the calibration factor of the flow meter and selecting the desired units of measurement. The instrument automatically calculates its own divisor.

The wide variety of unit options for total and rate gives users the freedom to customize the display, inputs and outputs for specific needs.

With the built-in wizard that guides users step by step through the configuration process, even first-time users will get dependable results in just minutes.

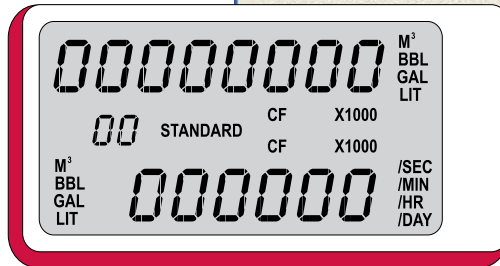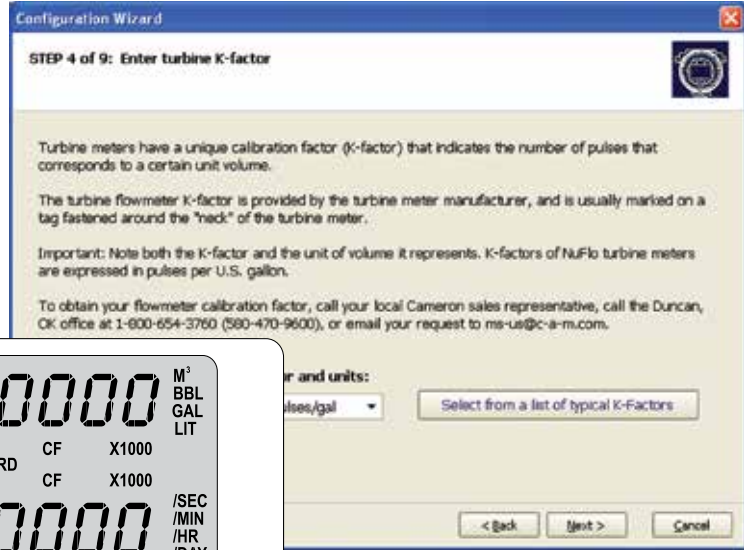


## Keypad Configuration

The MC-III EXP can be configured with either the software interface or the six-button keypad on the front of the instrument. Built-in shortcuts to common functions (see diagram below) simplify configuration, reducing the user's time spent on site.

## MC-III EXP and Turbine Meter Packages

The MC-III EXP can be packaged with a NUFLO or BARTON® 7000 Series gas or liquid turbine meter and a suitable CSA or ATEX approved adapter and shipped straight from the factory, ready for installation.

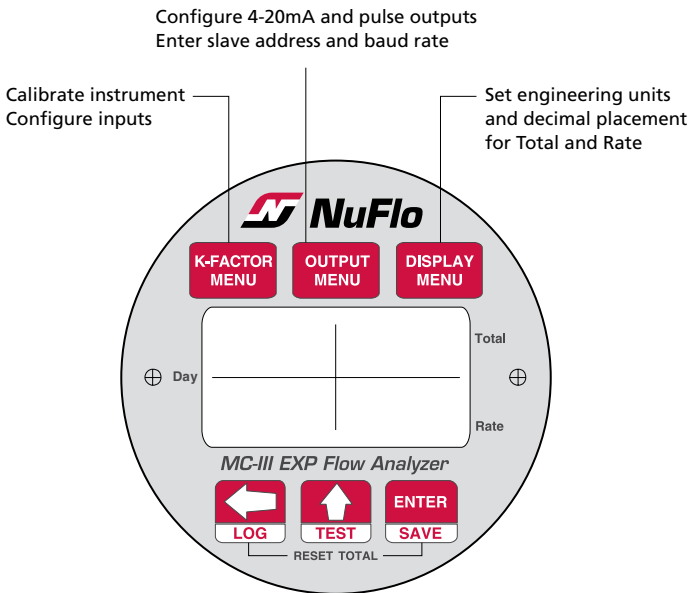

## Display

- 8-digit display of total
- 6-digit display of rate (11-segment characters for easy-to-read prompts)
- Character height – 0.3"
- Adjustable contrast and update period
- User-selectable units of measurement:
  - Total: bbl, gal, liters, cubic meters, cubic feet, standard cubic feet, user-defined units (and all units x 1000)
  - Rate: Any of the above total engineering units per day, hour, minute or second

## Calibration

- Liquid flow meter: User enters calibration factor of meter and selects units of measurement
- Gas flow meter: User enters calibration factor of meter, pressure and temperature parameters, and FPV via user interface software

## Power Supply Options

- 3.6 VDC lithium battery pack
  - 2-year life, typical (main or backup power supply)
- Alkaline battery pack option (main or backup power supply)
  - CSA approved devices only
  - not recommended for temperatures consistently below 20° F (-7° C)
- External power supply (6 to 30 VDC) with internal battery backup
- Loop-powered (4-20 mA output) with internal battery backup

## Temperature Range

- Lithium battery: -40° F to 158° F (-40° C to 70° C)
- Alkaline battery pack (CSA only): 20° F to 140° F (-7° C to 60° C)
- LCD contrast is reduced below -4° F (-20° C)

## Certification

- CSA approved for US and Canada
  - Class I, Div. 1, Groups B, C, D (explosion-proof)
  - Type 4 enclosure
  - T6 temperature class
- ATEX/IECEx approved
  - Category II, Group 2, Gas/Dust
  - Ex d IIC T6 Gb
  - Ex tD A21 IP66 T85°C
- CE-approved
- Complies with EMC Directive 2004/108/EC

## Communications/Archive Retrieval

- RTU mode Modbus
- Enron Modbus
- 16-bit slave address supported
- Data printouts in tabular or chart formats
- Data export to spreadsheet (.xls and .csv formats)

## Inputs

### Turbine Meter Input

- Configurable sensitivity adjustment
- Frequency range: 0 to 3500 Hz

### Remote Reset Input

- Optically isolated
- Supply range: 3.0 to 30 VDC

### External Reset Switch (Option)

- Explosion-proof
- Daily log viewing capabilities

### Pulse Input

- Optically isolated
- Supply range: 3.0 to 30 VDC
- Frequency range: 0 to 3500 Hz

## Outputs

### Analog Output

- 4-20 mA, loop-powered (two-wire)
- 16-bit resolution
- Accuracy: 0.1% of full scale at 77° F (25° C), 50 PPM/°C temperature drift
- Loop power: 8.0 to 30 VDC
- Zero and full-scale engineering values configurable from front panel
- Cannot be used simultaneously with amp and square output

### RS-485 Communications


- Baud rates: 300, 600, 1200, 2400, 4800, 9600, 19,200, 38,400, 57,600 and up to 115.2K
- Optional external communications port
  - RS-485 adapter (CSA and ATEX approved)
  - USB adapter (CSA approved)

### Volumetric Pulse Output

- Solid-state relay
- Output rating: 60 mA max at 50 VDC
- Configurable pulse duration and scale factor

### Amp and Square Output

- Open-drain transistor output of turbine meter input signal
- Output rating: 50 mA at 30 VDC
- Cannot be used simultaneously with analog output

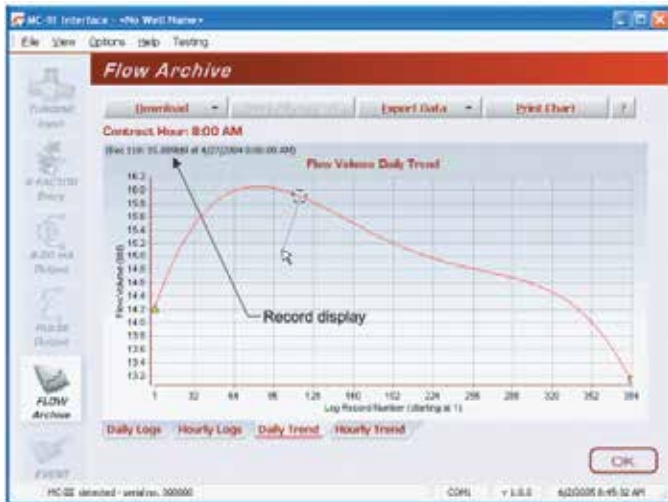

## Interface Software

- Provided at no additional charge
- Complete configuration
- Real-time data
- Downloads and exports
- “Wizard” offers step-by-step calibration procedure
- Windows® XP, Windows Vista®, or Windows® 7 required

## Flow Archive

- 384 daily logs
- 768 hourly logs
- 345 event logs
  - K-factor changes
  - Input setting changes

### NORTH AND SOUTH AMERICA

14450 JFK Blvd.  
Houston, TX 77032  
USA  
Tel 1 281 582 9500  
ms-us@c-a-m.com

### EUROPE, AFRICA, CASPIAN AND RUSSIA

3 Steyning Way  
Southern Cross Trading Estate  
Bognor Regis  
West Sussex PO22 9TT  
England, UK  
Tel 44 1243 826741  
ms-uk@c-a-m.com

### ASIA PACIFIC

Suite 16.02 Menara  
AmFirst  
No. 1 Jalan 19/3  
46300 Petaling Jaya  
Selangor Darul Ehsan  
Malaysia  
Tel 603 7954 0145  
ms-kl@c-a-m.com

### MIDDLE EAST

Level 9, Al Jazira Club Tower A  
P.O. Box 47280, Muroor Road  
Abu Dhabi  
United Arab Emirates  
Tel 971 2 596 8400  
ms-uk@c-a-m.com